

DAV-MP-1-A**1" Automatic Air Valve**

For High pressure

Description

The valve is designed for an efficient release of entrapped air from the pipeline, while the network is at normal working pressure.

Due to the relatively large orifice, compare to other Automatic valves in the market, it can also release the air through initial filling of a small-diameter pipe, or admit air into it while it is drained.

Properties

An Automatic air valve, that enables the release of dissolved air that accumulate in the pipeline. The valve will release the air at normal operation pressures of the pipeline. The Float is made of naturally-buoyant material (specific weight lower than 1). The float activates a sealing stripe, that closes the outlet when the water will fill the valve body.

On accumulation of air in the valve, loss of buoyancy causes the float to drop and to pull the strip, thus opening of the air outlet.

The Hydraulic sealing of the orifice will provides a drip-tight closure at a pressure of 2mwc (3psi).

External cast iron body protects the valve from high internal pressures.

Operation

Releasing entrained air from the pipeline. Small quantities of diluted air accumulate in high peaks of the pipeline and in the peak of the valve.

The pressurized air expels the water. The descending water level moves the main float with it. At a certain position the main float pulls down the small seal, that partially opens the nozzle.

The pressurized air can escape, the water level rises and the nozzle re- closes.

Technical Specifications



- Operating pressure of 0.2 to 25 bars
- 1" BSP or NPT threaded base – as per the customer's choice
- Air flow, even at a critical velocity created by pipeline pressure of 0.9 bar, will not cause premature closure of the valve
- Structure materials: Cover: Cast Iron, Base: Brass
 - Internal parts: corrosion resistant, reinforced plastic materials and synthetic rubber
- The valve allows the discharge of 28m³/h of air at pipe pressure of 1.0 bar.



1" Automatic Air Valve

Performance

Air intake / discharge

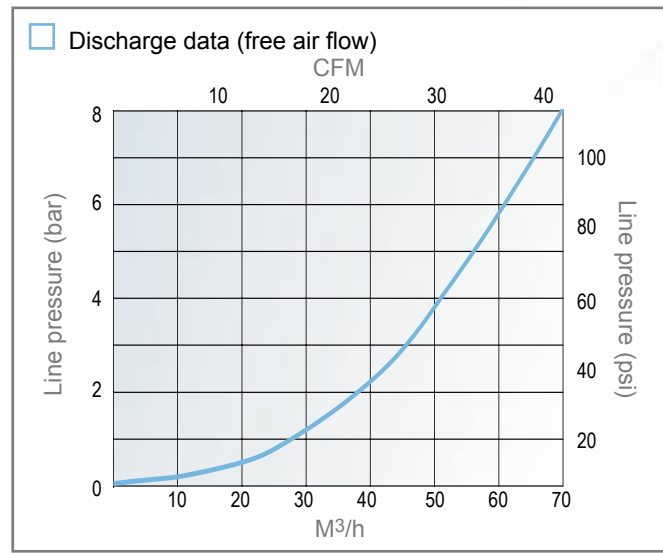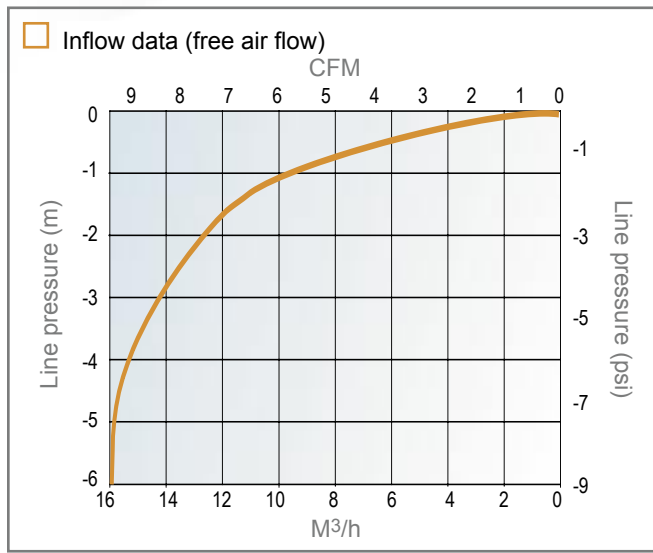

Dimensions

Dimension	SI	USIS
H - Height	140mm	5½ in.
W - Width	84mm	3.2 in.
D - Threaded Attachment	1 BSP	1 NPT
A - Nozzle Area	25 mm²	0.04 in²
Weight	2.2 kg	4.85 lbs.

Part Specifications

Part	Description	Material
1	Base	Brass
2	O-ring	NBR rubber
3	Float	Polypropylene
4	Guide housing	GRP
5	Valve seal	EPDM rubber
6	Outlet port	Brass
7	Body	Cast Iron

