

30-FLDI\PS Differential Float and Pressure Sustaining Valve

Principal of operation

The Dorot Series 300 Differential Float and Pressure sustaining Valve ('30-FLDI\PS') is An automatic, float actuated and pressure sustaining pilot controlled valve. The valve will open and sustain a minimal required upstream-pressure when the level reached a set opening height and close on a set lower/higher level. The differential between opening and closing levels is adjustable. In case the upstream pressure is lower than the set-value, the valve will keep a closed position, regardless of the water-level.



S300 Features

- Superb performance:
 - Regulates at a stable mode, regardless of valve-size, down to near-zero flow. Thus, eliminating the need for a special low flow plug-design (such as 'V-port') or a bypass valve.
 - 'Floating', low-friction internal-trim design, guided by unique LPT® device.
- High reliability:
 - All control ports are fitted with SST sleeves for preventing corrosion-blockage.
 - Pre-shaped reinforced diaphragm – for easier assembly and improved longevity.
- Reduced periodic inspection/maintenance labor:
 - The control-trim is fitted with a self-flushing, inline control-filter.
 - Easy in-situ adjustment and maintenance.
- Versatility:
 - A standard and simple single-chamber valve design, provides smooth operation. Conversion to a double chamber is a patented option.

Standard Materials

- Body & Cover – Ductile Iron
Optional – Cast Steel, SST, N.A.B, S.Duplex
- Main Internal – SST (1.5"-6), Coated steel (8"-32")
Optional – Cast Steel, SST, N.A.B, S.Duplex
- Elastomers – EPDM
Optional – NBR, Neoprene, Viton or others
- Coating – Polyester, Epoxy / Optional – Halar and others
- Control trim – Brass, PA / Optional – SST316, Duplex

Purchase Specifications

- The valve will be hydraulic, pilot-operated globe type.
- Face-to-face length dimension meets ISO 5752 Standard.
- The stem will be guided at the top by a replaceable guide bearing and at the bottom by a stainless steel unique LPT® device.
- The valve will regulate any flow within the specified range without the need for a smaller bypass valve or throttling plug.
- All control ports will be corrosion free protected by stainless steel 316 inserts.

Design Considerations

- The valve should be suited for the maximal flow and allowed Headloss.
- For low pressure systems, consider a 3-way control pilots.
- Large pressure differentials may cause cavitation damage. Consult Dorot for solutions if such conditions are expected.

Quick Sizing


- Valve sized to be the same as line-size or one nominal-size smaller.
- Maximum recommended flow velocity for continuous operation 5.5 m/sec (18 ft. /sec).

Pressure rating

- Model 30, 30A for medium pressure (PN16 bar / 250 psi)
- Model 31, 31A for high pressure (PN25 bar / 360 psi)


Typical Installation

Typical applications include a Differential Float Valve Model 30-FLDI\PS. The valve will open and sustain a minimal required upstream-pressure when the level reached a set opening height and close on a set lower/higher level.

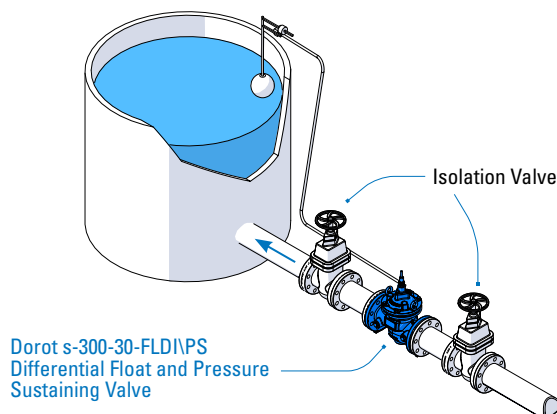

Main Control System Components*

1. Main Valve
2. Ball valve
3. Self-flushing filter
4. 3W FLDI Pilot Valve
5. 3W Ball valve
6. Orifice (Optional)
7. 31-10SD Pilot
8. Pressure gauge

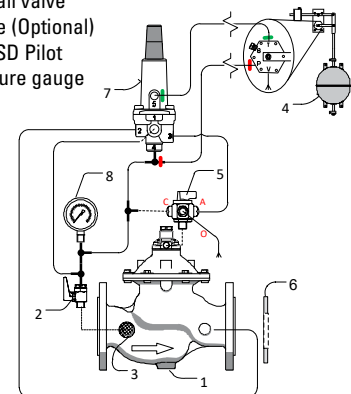

* Indicative drawing